BEAMZ MADE EAZY


150.162 V1.1

STARCOLOR54TW

QUICK START GUIDE

CONTROL MENU

If the display is in standby, unlock it:

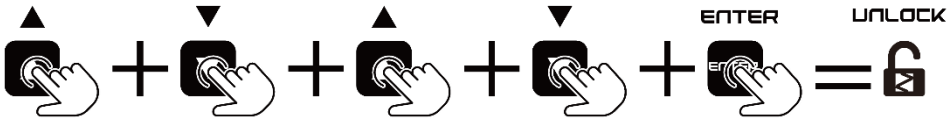

MENU				DESCRIPTION
SET UP	Dimmer ALL	000-255		Master dimmer
	Balance	Dimmer Warm	000-255	Color Dimmer
		Dimmer Cold	000-255	Color Dimmer
	Key lock	Off		Activate key lock yes/no
		On		
	Dimming Delay	None		
		0.25 seconds		
		0.5 seconds		
		0.75 seconds		
		1 second		
	Remote	Off		Activate IR remote yes/no
		ON		
	Display	30S		Display sleep mode or on
		ON		
	Reset			Reset mode
	Refresh rate	600Hz		Refresh rates
		1200Hz		
		2400HZ		
		9600HZ		
	MAX temp	Choose between 30 - 70		Choose max temp
INFO	Software Ver ***			Shows software version
	Working times ******H *M			Shows Working hours
	RDM:**********			Shows RDM address
DMX ADDRESS		000-512		Select a DMX Channel
CHANNEL MODE		2CH,4CH,7CH,11CH		Select a Channel mode
DIM CURVE		Linear, Square Law, Inv.Squ. Law, S-Curve		Select a Dim curve
DMX STATE		DMX Hold/ Blackout		Select what to do when there is no DMX signal input.
SLAVE MODE		Slave		Select slave mode
AUTO MODE	Speed	01-31		Select speed auto mode
	Auto	01-10		Select different auto mode
MANUAL MODE	Warm	000-255		Adjust dimming
	Cold	000-255		Adjust dimming
	Strobe	00-20		Adjust strobe
	Color	01-10		Adjust Color

DMX CHANNELS

2 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Warm	000-255	Dimmer
2	Cold	000-255	Dimmer

4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000- 255	Master dimmer
2	Warm	000-255	Dimmer
3	Cold	000-255	Dimmer
4	Strobe	000-009	Led on
		010-255	Strobe (from slow to fast)

7 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000- 255	Master dimmer
2	Warm	000-255	Dimmer
3	Cold	000-255	Dimmer
4	Strobe	000-009	Led on
		010-255	Strobe (from slow to fast)
5	Static Color	000-009	No function
		010-174	CCT
		175-189	3000k
		190-204	3200k
		205-219	3500k
		220-234	4000k
		235-249	5600k
		250-255	Default
6	Auto program	000-020	No function
		021-030	Auto 1
		031-040	Auto 2
		041-050	Auto 3
		051-060	Auto 4
		061-070	Auto 5
		071-080	Auto 6
		081-090	Auto 7
		091-100	Auto 8
		101-110	Auto 9
		111-120	Auto 10
		121-255	Reserved
7	Auto speed	000-255	Speed slow to fast

11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000- 255	Master dimmer
2	Dimmer fine	000- 255	Fine control of master dimmer
3	Warm	000- 255	Dimmer
4	Warm fine	000- 255	Fine control of Red dimmer
5	Cold	000- 255	Dimmer
6	Cold fine	000- 255	Fine control of Green dimmer
7	Strobe	000-009	Leds on
		010-255	Strobe (from slow to fast)
8	Static color	000-009	No function
		010-174	CCT
		175-189	3000k
		190-204	3200k
		205-219	3500k
		220-234	4000k
		235-249	5600k
		250-255	Default
9	Auto mode	000-020	No function
		021-030	Auto 1
		031-040	Auto 2
		041-050	Auto 3
		051-060	Auto 4
		061-070	Auto 5
		071-080	Auto 6
		081-090	Auto 7
		091-100	Auto 8
		101-110	Auto 9
		111-120	Auto 10
		121-255	Reserved
10	Auto speed	000-255	Speed slow to fast
11	Dimming curve	000-015	Null
		016-075	Linear
		076-135	Square Law
		136-195	Inv.Squ.Law
		196-255	S-Curve

BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT

beamZ Pro

offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!

BEAMZLIGHTING.COM