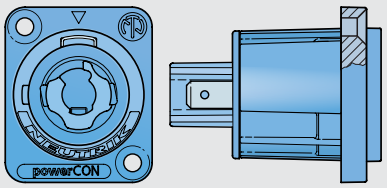
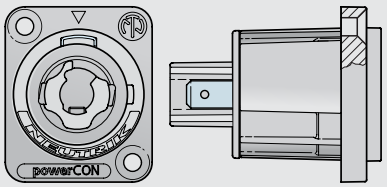
ASSEMBLY RECOMMENDATION
powerCON® | Chassis mounting

Fastening recommendation for Neutrik powerCON 20 A chassis connectors

- **Rear mounted connectors:**
  Versions with countersunk mounting holes: no suffix (example: NAC3MPXXA)
- **Convenient fastening with countersunk screw holes:**
  (example: **NAC3MPXXA***)

Please see the recommended options including the torque limits below:

Chassis connector (note mounting hole type)	Screw Type | Part number example (screws not included)	Mounting version & maximum allowable torque M_A	
		Rear assembly	Front assembly
	 **NAC3MPXXA*** (no suffix) • Countersunk thru holes for countersunk machine screws (e.g.: M3, 4-40)	**50 Ncm**	**50 Ncm**
	 **NAC3MPXXB*** (no suffix) • Countersunk thru holes for countersunk machine screws (e.g.: M3, 4-40)	**50 Ncm**	**50 Ncm**

Neutrik AG	**LI**	T: +423 / 237 24 24	F: +423/232 53 93	**Neutrik France**	**FR**	T: +33 1/4131 6750	F: +33 1/4131 0511
Neutrik USA Inc.	**USA**	T: +1 704 / 972 3050	F: +1 704/438 9202	**Neutrik Tokyo Ltd.**	**JP**	T: +81 3/3663 4733	F: +81 3/3663 4796
Neutrik (UK) Ltd.	**UK**	T: +44 1983 / 811 441	F: +44 1983/811 439	**Neutrik Hong Kong Ltd.**	**HK**	T: +852/2687 6055	F: +852/2687 6052
Neutrik Vertriebs GmbH	**DE/NL/AT/DK**	T: +49 8131 / 280 890	F: +49 8131/280 830	**Neutrik India Pvt. Ltd.**	**IND**	T: +91/982 05 43 424	F: +91/22 26163 540

Draft. Nr.: BDA 592 V1 | Update: 2020-09-02 | Data subject to change without prior notice. © 2020 NEUTRIK®. NEUTRIK® are registered trademark of Neutrik AG. ALL RIGHTS RESERVED.

www.neutrik.com