CS SERIES

COMPACT
ACTIVE
SUBWOOFERS

CS Series CS15 and CS18 Active Subwoofers are powerful, portable solutions designed to deliver premium bass performance and unmatched value. Expanding and elevating the C Class loudspeaker lineup with simple plug-and-play deployment, CS Series subwoofers deliver clean, impactful low-frequency performance for DJs and mobile entertainers, event production professionals, musicians and bands, houses of worship, and small-format installations.



CS15 CS18

Designed for robust reliability and portability, both models feature lightweight enclosures for effortless transport and setup. CS Series combines exceptional sonic consistency with user-friendly operation, including simple and intuitive onboard controls as well as expanded functionality via the QSC Loudspeaker Control app over Bluetooth®.

With performance designed for real-world needs and pricing aligned for maximum return on investment, CS15 and CS18 models enable users to build scalable, fully integrated systems without overspending or compromising on audio quality. Powerful, versatile, and easy to use, CS Series subwoofers are the perfect solution for today's discriminating subwoofer users.

Key Features

- Scalable lineup with compact 15-inch and higher-output 18-inch models to support a wide range of system sizes and applications
- Bluetooth® Audio featuring True Wireless Stereo (TWS), which ensures low-latency pairing between music source and both left and right loudspeakers, simultaneously.
- Wireless control of loudspeaker features with the QSC Loudspeaker Control app
- Class D Amplification module featuring 2600 W of peak power with Universal Power Supply and low AC consumption
- Simple and intuitive Rear User Interface for quick setup and on-the-go adjustments
- DEEP™ preset for added low frequency extension and impact
- Quick Cardioid deployment preset (requires min. 2 subwoofers)
- Rugged painted wood enclosure for lasting durability
- Two XLR inputs with direct pass-thru and assignable output options
- M20 threaded speaker pole mount
- 6 Year Warranty (when registered within 30 days from purchase)

07-21-2026-EN

6 year warranty

When registered within 30 days of purchase*

*1-year warranty on battery


preliminary specifications

	CS15	CS18
Configuration	Direct Radiating	
LF Transducer	15-inch (381 mm), Cone	18-inch (460 mm), Cone
Frequency Response (-6 dB)	47 Hz–100 Hz / DEEP: 44 Hz–100 Hz	46 Hz–96 Hz / DEEP: 39 Hz–96 Hz
Frequency Range (-10 dB)	43 Hz–108 Hz / DEEP: 39 Hz–100 Hz	40 Hz–103 Hz / DEEP: 35 Hz–103 Hz
Nominal Coverage Angle	Omni-Directional or Cardioid Radiation Modes (Cardioid Setup Requires min. 2 Units)	
Maximum Rated SPL[1]	133 dB	134 dB
Amplifier	Class D, 2600 W (peak)	
Cooling	Convection Cooled	
Controls	Power On/Off Gain Control 2 x Selection Buttons	
Indicators	Power LED Limiter Active LED Input System LED 2 x Signal LED	
Connectors	2 x Locking XLR/F ¼ in Combo 2 x XLR/M (1 x Loop-Thru Output, 1 Post-DSP Output) 1 x IEC Power Connector	
AC Power Input	UniversAl Power Supply, 100–240 VAC, 50–60 Hz	
AC Power Consumption[2]	100 VAC 2.7 A–120 VAC 2.2 A–240 VAC 1.1 A, 50/60 Hz	
Enclosure	12–15 mm Birch Plywood	
Color	Black (RAL 9011)	
Grille	16-Gauge Black Powder Coated Steel	
Dimensions (HxWxD)	586 x 450 x 517 mm 23.1 x 17.7 x 20.4 in	640 x 513 x 658 mm 25.2 x 20.2 x 25.9 in
Net Weight	26.6 kg (58.7 lb)	37.6 kg (82.9 lb)
Shipping Weight	32.1 kg (70.7 lb)	44.6 kg (98.3 lb)
Optional Accessories	CS15-CVR, SP-16X, SP-26, SP-36	CASTER KIT-S, CS18-CVR, SP-16X, SP-26, SP-36
Regulatory	CE, CB, cTUVus, FCC, NOM, PSE, KCC, BSMI, RCM, RoHS 3.0, CA65, WEEE, etc.	


[1] Measured at 1 meter, on-axis, using IEC268 Pink Noise.
[2] ⅛ Power is representative of current draw with typical music program material with occasional clipping.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
All specifications are subject to change without notice.

measurements


CS15

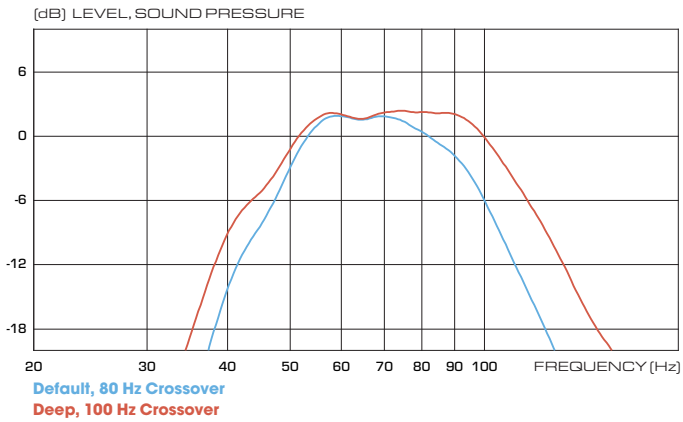


CS18

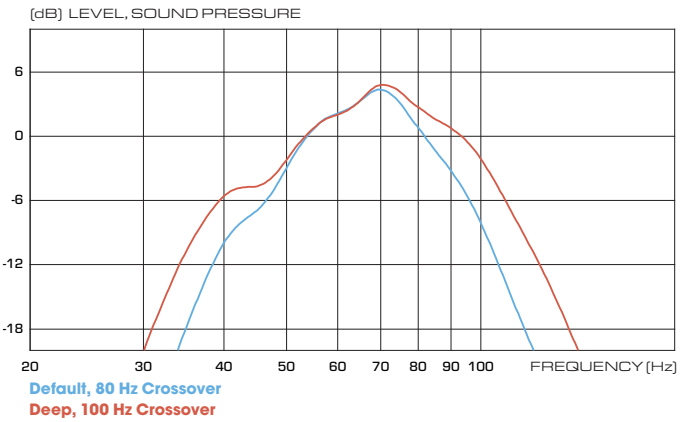


deployments

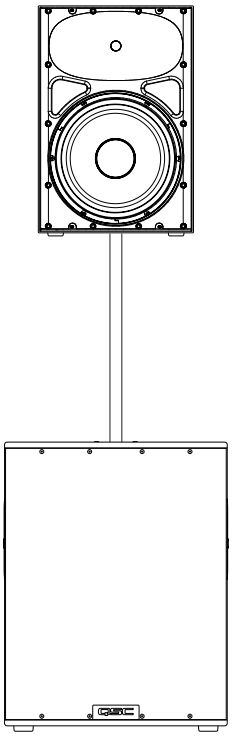

CS15 with CB10 on pole

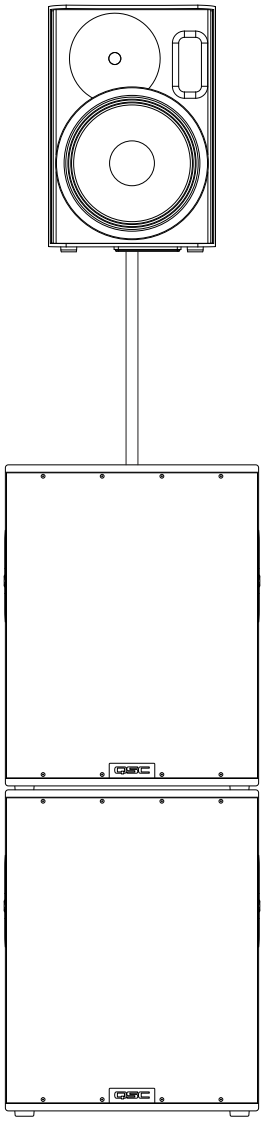

CS18 double stacked with CP12 on pole

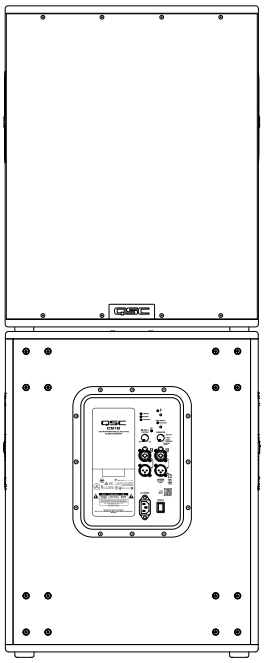


CS18 double stacked in cardioid deployment


Consult the User Manual for complete list of recommended deployments.

dimensions

CS15

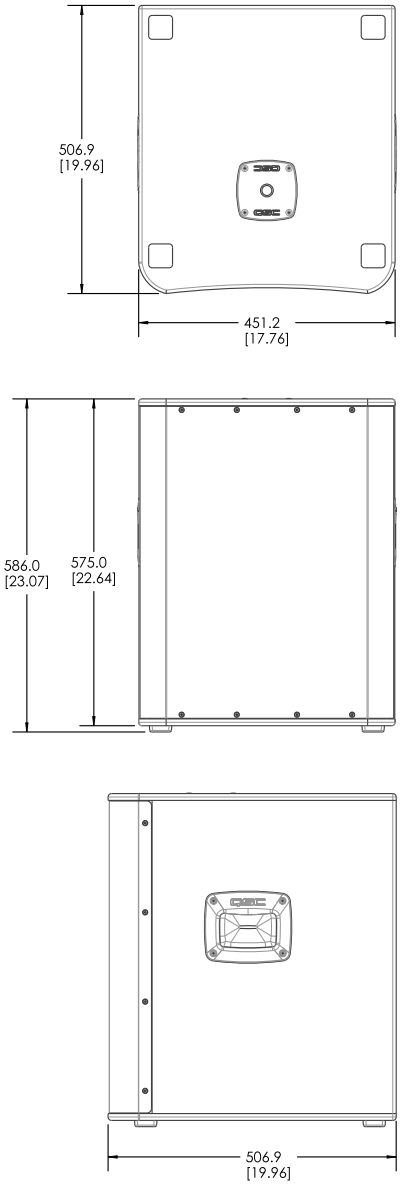

CS18

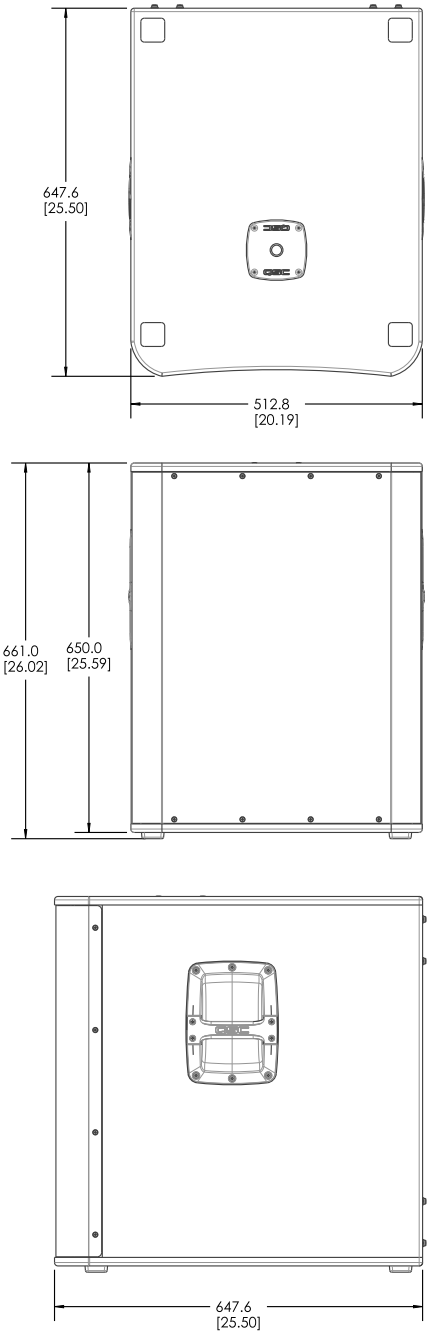

accessories

Optional Accessories

CS15-CVR	Transport Cover for CS15
CS18-CVR	Transport Cover for CS18
CASTER KIT-S	3-inch caster kit (compatible with CS18 only)
SP-16X	16-inch 35mm loudspeaker pole extension with M20 threads
SP-26	26-inch 35mm loudspeaker pole with M20 threads
SP-36	36-inch 35mm loudspeaker pole with M20 threads

©2026 QSC, LLC. All rights reserved. QSC, LLC's trademarks include but are not limited to all trademarks listed at qsc.com/trademarks, some of which are registered in the U.S. and/or other countries. All other trademarks are the property of their respective owners. Patents may apply or be pending.